

LGHP 2


SKF High Performance, High Temperature Bearing Grease

SKF LGHP 2 is a premium quality mineral oil based grease, using a modern Polyurea (di-urea) thickener. It is suitable for electric motors and similar applications.

- Extremely long life at high temperatures
- Wide temperature range
- Excellent corrosion protection
- High thermal and mechanical stability
- Good start-up performance at low temperatures
- Compatibility with common polyurea and lithium thickened greases
- Low noise properties

Typical applications:

- Electric motors: Small, medium and large
- Industrial fans, including high speed fans
- Water pumps
- Rolling bearings in textile, paper processing and drying machines
- Applications with medium and high speed ball (and roller) bearings operating at medium and high temperatures
- Clutch release bearings
- Vertical shaft applications
- Kiln trucks and rollers

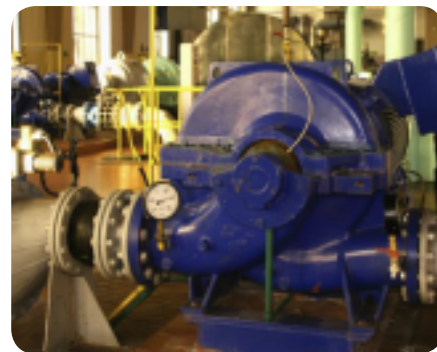

ПОДШИПНИК
СЕРВИС

SKF

www.bearing-service.ru

Technical data

Designation	LGFP 2/(pack size)	
DIN 51825 code	K2N-40	
NLGI consistency class	2-3	
Soap type	Di-urea	
Colour	Blue	
Base oil type	Mineral	
Operating temperature range	-40 to +150 °C (-40 to +300 °F)	
Dropping point DIN ISO 2176	>240 °C (>465 °F)	
Base oil viscosity		
40 °C, mm ² /s	96	
100 °C, mm ² /s	10,5	
Penetration DIN ISO 2137		
60 strokes, 10 ⁻¹ mm	245-275	
100 000 strokes, 10 ⁻¹ mm	365 max.	
Mechanical stability		
Roll stability, 50 hrs at 80 °C, 10 ⁻¹ mm	365 max.	
Corrosion protection		
Emcor: - standard ISO 11007	0-0	
- water washout test	0-0	
- salt water test (100% seawater)	0-0	
Water resistance	DIN 51 807/1, 3 hrs at 90 °C	1 max.
Oil separation	DIN 51 817, 7 days at 40 °C, static, %	1-5
Lubrication ability	R2F, running test B at 120 °C	Pass
Copper corrosion	DIN 51 811, 110 °C	1 max. at 150 °C (300 °F)
Rolling bearing grease life	ROF test L ₅₀ life at 10 000 r/min., hrs	1 000 min. at 150 °C (300 °F)
Fretting corrosion	ASTM D4170 (mg)	7*
Available pack sizes	420 ml cartridge 1, 5, 18, 50, 180 kg SKF SYSTEM 24 (LAGD/LAGE)	

* Typical value



SKF lubricants offer major competitive advantages:

- Designed and tested to outperform under real conditions
- Product data include specific test results enabling a better selection
- Strict quality control of every production batch help ensure consistent performance
- Quality control allows SKF to offer a five-year shelf-life* from the date of production



Production processes and raw materials vastly influence grease properties and performance. It is virtually impossible to select or compare greases based only on their composition. Therefore, performance tests are needed to provide crucial information. In over 100 years, SKF has accrued vast knowledge about the interaction of lubricants, materials and surfaces.



This knowledge has led SKF, in many cases, to set industry standards in bearing lubricant testing. Emcor, ROF, ROF+, V2F, R2F and Bequiet are just some of the multiple tests developed by SKF to assess the performance of lubricants under bearing operating conditions. Many of them are widely used by lubricant manufacturers worldwide.

* SKF LGFP 2 food grade grease offers a two-year shelf-life from the date of production

© SKF is a registered trademark of the SKF Group.

© SKF Group 2011

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 12051 EN · July 2011

